




2SK3019KT Plastic-Encapsulate MOSFETS


| $V_{(BR)DSS}$ | $R_{DS(on)MAX}$ | I_D |
|---------------|-----------------|-------|
| 30V | 8Ω@4V | 100mA |
| | 13Ω@2.5V | |



FEATURE

- Low on-resistance
- Fast switching speed
- Low voltage drive makes this device ideal for Portable equipment
- Easily designed drive circuits
- Easy to parallel

Marking: KN



SOT-523

MOSFET MAXIMUM RATINGS (Ta = 25°C unless otherwise noted)

| Symbol | Parameter | Value | Unit |
|-----------|---|----------|-------|
| V_{DS} | Drain-Source Voltage | 30 | V |
| V_{GS} | Gate-Source Voltage | ±20 | V |
| I_D | Continuous Drain Current | 0.1 | A |
| $R_{θJA}$ | Thermal Resistance, Junction-to-Ambient | 833 | °C /W |
| P_D | Power Dissipation | 0.15 | W |
| T_J | Junction Temperature | 150 | °C |
| T_{stg} | Storage Temperature | -55~+150 | °C |



MOSFET ELECTRICAL CHARACTERISTICS






$T_a=25^{\circ}\text{C}$ unless otherwise specified

| Parameter | Symbol | Test Condition | Min | Typ | Max | Units | |
|-----------------------------------|--------------|---|-----|-----|---------|----------|----|
| Off Characteristics | | | | | | | |
| Drain-Source Breakdown Voltage | V_{DS} | $V_{GS} = 0V, I_D = 10\mu A$ | 30 | | | V | |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS} = 30V, V_{GS} = 0V$ | | | 1 | μA | |
| Gate -Source leakage current | I_{GSS} | $V_{GS} = \pm 20V, V_{DS} = 0V$ | | | ± 2 | μA | |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS} = 3V, I_D = 100\mu A$ | 0.8 | | 1.5 | V | |
| Drain-Source On-Resistance | $R_{DS(on)}$ | $V_{GS} = 4V, I_D = 10mA$ | | | 8 | Ω | |
| | | $V_{GS} = 2.5V, I_D = 1mA$ | | | 13 | Ω | |
| Forward Transconductance | g_{FS} | $V_{DS} = 3V, I_D = 10mA$ | 20 | | | mS | |
| Dynamic Characteristics* | | | | | | | |
| Input Capacitance | C_{iss} | $V_{DS} = 5V, V_{GS} = 0V, f = 1MHz$ | | 13 | | pF | |
| Output Capacitance | C_{oss} | | | | 9 | | pF |
| Reverse Transfer Capacitance | C_{rss} | | | | 4 | | pF |
| Switching Characteristics* | | | | | | | |
| Turn-On Delay Time | $t_{d(on)}$ | $V_{GS} = 5V, V_{DD} = 5V,$ $I_D = 10mA, R_g = 10\Omega, R_L = 500\Omega,$ | | 15 | | ns | |
| Rise Time | t_r | | | | 35 | | ns |
| Turn-Off Delay Time | $t_{d(off)}$ | | | | 80 | | ns |
| Fall Time | t_f | | | | 80 | | ns |

* These parameters have no way to verify.




Typical Characteristics

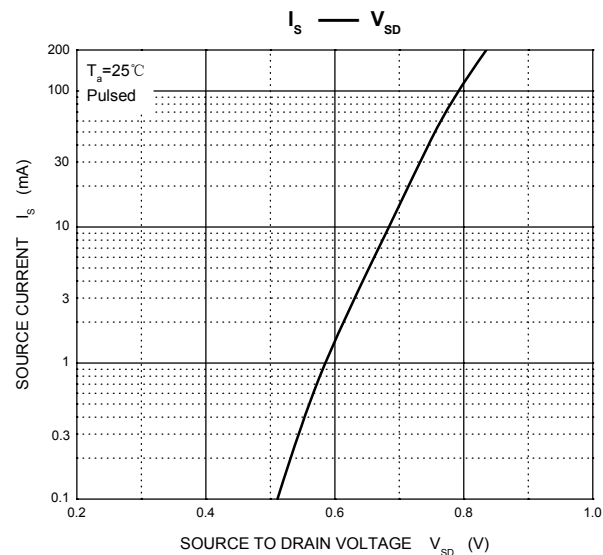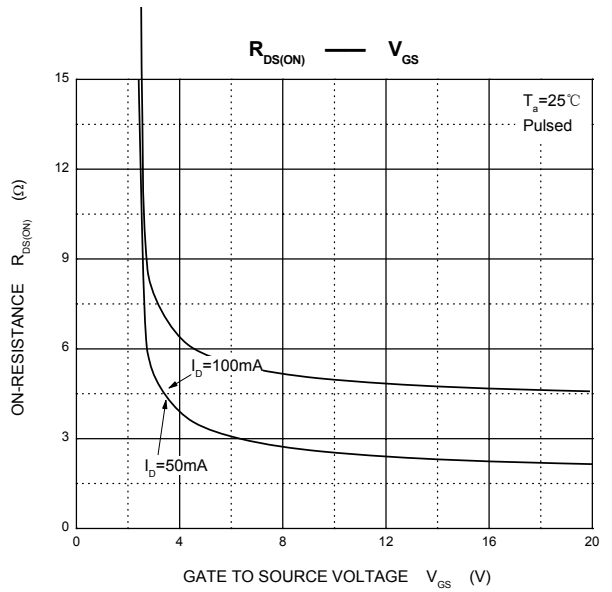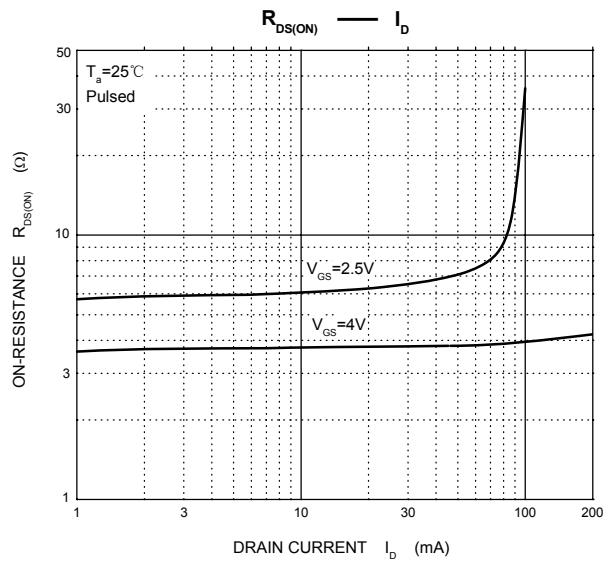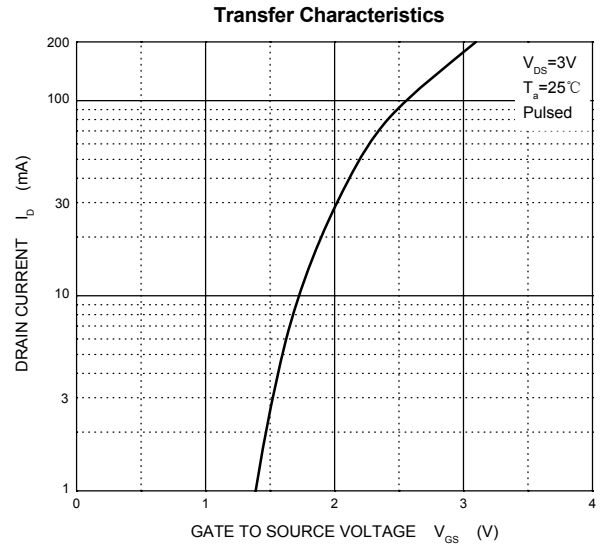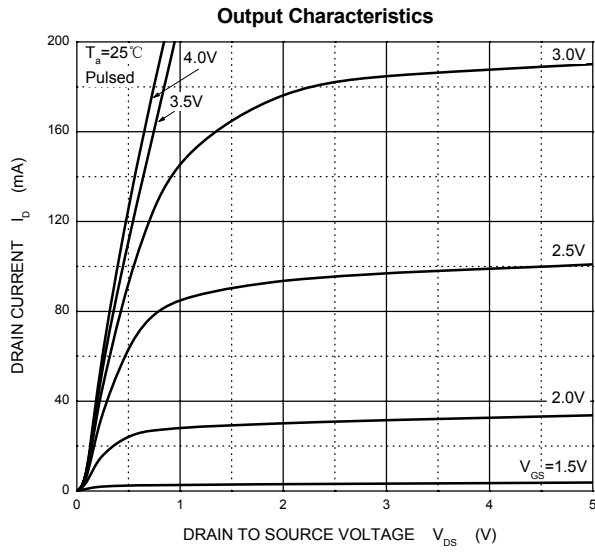




SOT-523 Package Outline Dimensions

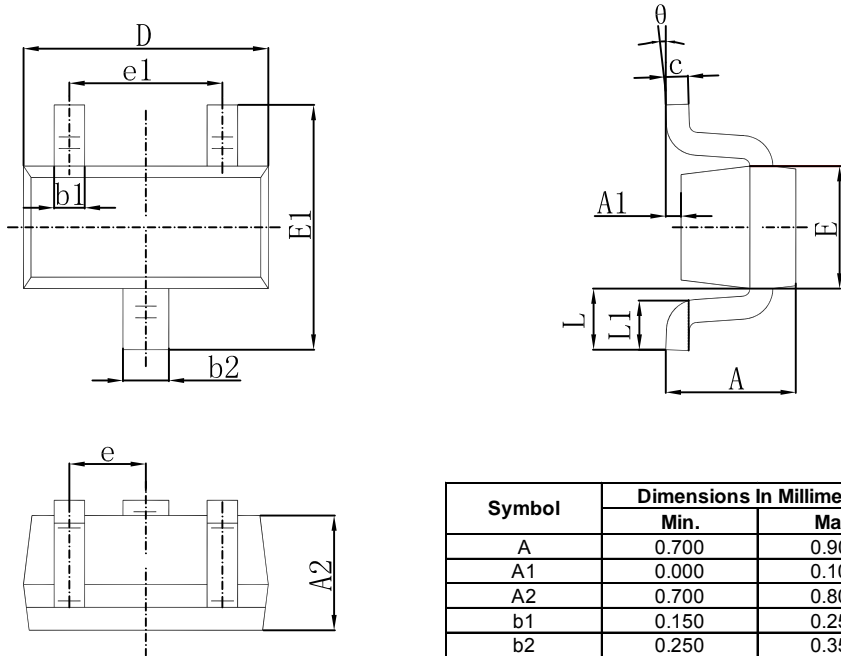

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.700 | 0.900 | 0.028 | 0.035 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.700 | 0.800 | 0.028 | 0.031 |
| b1 | 0.150 | 0.250 | 0.006 | 0.010 |
| b2 | 0.250 | 0.350 | 0.010 | 0.014 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 1.500 | 1.700 | 0.059 | 0.067 |
| E | 0.700 | 0.900 | 0.028 | 0.035 |
| E1 | 1.450 | 1.750 | 0.057 | 0.069 |
| e | 0.500 TYP. | | 0.020 TYP. | |
| e1 | 0.900 | 1.100 | 0.035 | 0.043 |
| L | 0.400 REF. | | 0.016 REF. | |
| L1 | 0.260 | 0.460 | 0.010 | 0.018 |
| θ | 0° | 8° | 0° | 8° |

SOT-523 Suggested Pad Layout



Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.